


/80mm Receipt Printer

ZY808

80mm Thermal POS Printer

Features

- Fast printing of text and images
- Support network monitor function, IP change directly from different gateway and QR code
- It's built-in power adaptor, which avoid messy cables everywhere, save space
- With wall hanging equipped
- It can be used as top paper coming printer and front paper coming printer at the same time

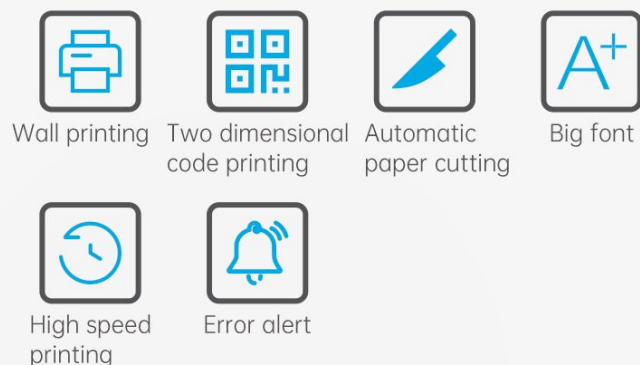

Model	ZY808	
Print Method	Direct Thermal	
Resolution	576dots/line or 572dots/line	
Printing Width	72mm	
Paper separator(option)	48mm/52mm/56mm/64mm/68mm/76mm/80mm	
Memory	Input buffer: 256k bytes	NV Flash: 256k bytes
Interface	U+L/U+S+L/U+BT/U+WIFI/U+S+L+BT/U+S+L+WIFI	
Print Speed	230mm/s	260mm/s
Fonts	Font A: 12x24 Font B: 9x17 Chinese: GB18030, BIG5 24x24dots Japanese/Korea: Optional	
User-defined	Support	
1D	UPC-A/UPC-E/JAN13 (EAN13) /JAN (EAN8) /CODE39/ITF/CODABAR/CODE93/CODE128	
2D	PDF417, QR code, Datamatrix	
Sensors	Paper out, cover open, cutter jam, paper jam and black mark detection	
Power Supply	Input: AC 100V-240V 50/60HZ Output: DC 24V/2.5A	
Paper Type	Thermal Receipt Paper	
Paper Width	48mm/52mm/56mm/64mm/68mm/76mm/80mm	
Paper	Max. Ø 83 mm 0.06~0.08mm	
Paper Cut	Auto-cutter	
Accessories	Data cable, power adaptor, power cord, paper roller, CD, manual, roller, paper separator(option)	
Individual box	Dimension 266×164×160mm(LXWXH) 1unit/carton	
Master carton	Dimension 550×350×515mm(LXWXH)12unit/carton	
Condition	Working Condition: 0°C~45°C, 10%~80%RH Storage Condition: -10°C-60°C,10%~90%RH	
Dimensions	196(D)x143(W)x129(H)mm	
Weight	Net weight: 2.2kg	Gross weight:24.8kg/ctn
Reliability	Printing head: 100 KM Cutter: 1 million Cuts	
Power Supply	Windows XP /Vista/ Win7/Win8 /Win10/Win11/Win 2000/Win CE/OPOS/JPOS	